


HARFA VINTAGE




PRODUCT DETAILS

Surface structure Irregularly cross-sawn
Finish Osmo PolyX + Osmo PolyX top-coating


Engineered Wood - 14/3 mm - T&G

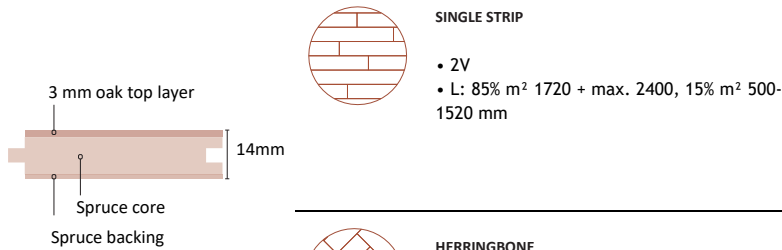

Grading	Width (mm)		
	190	225	245
Special	•	•	•
Rustic	•	•	•
Original	•	•	•
Calm	•		
Superb	•		
Elegance	•		
Superb/Elegance		•	•



Solid Wood - 20 mm - T&G

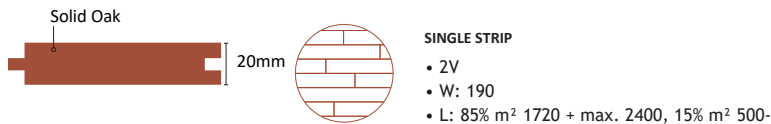

Grading	120/150	170/185
	Original	•

	Test method	Request	Result	
			Solid 20mm	3-layer 14mm
Production standard & Conformity	EN 14342, EN 13489, EN 13488 EN 13629, EN 13226		Implemented	Implemented
Moisture content	ČSN EN 13183-1		9 ±2%	7 ±2%
Formaldehyde emission	ČSN EN 717-1	≤ 0,124mq/m ³	E1	E1
PCP (pentachlorophenol)	CEN/TR 14823	≤ 5 ppm	meets	meets
Slip resistance	CEN/TS 15676		Dry ≥ 69 Wet ≥ 29	Dry ≥ 69 Wet ≥ 29
Reaction to fire	ČSN EN 13501-1		Cfl-S1	Dfl-S1
Thermal resistance	ČSN EN ISO 10456		0,15 m ² · K/W	0,11 m ² · K/W
Thermal conductivity	ČSN EN ISO 10456		0,13 W/mK	0,13 W/mK
Biological durability	ČSN EN 335-1, ČSN EN 335-2		Class 1	Class 1
Underfloor heating			Not recommended	Up to 225 mm
Recommended usage	Suitable for interior use in all project sectors: residential-commercial-hospitality-retail. Actual warranty & maintenance instructions apply			
Well-managed forests	This product is made with PEFC certified wood			

For more details, see <https://www.escoflooring.com>

ESCO General Terms and conditions apply, see <https://www.escoflooring.com>



DECOSPAN
Wood Solutions